



Size A_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
465	470	270	650	57.7
560	470	270	750	67.3
350	480	340	590	55.1
400	480	340	600	56.5
500	540	300	650	89.5
600	545	300	680	94.5
800	560	300	800	116.1
800R	560	300	800	115.3
825H970	560	300	970	147.5

Form A






Form BN



Size BU_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
100	515	305	400	46.5
125	520	305	450	53.2
150	520	305	490	58.4
175	527	305	550	68.2
200	527	305	600	75.5
210	615	320	500	77.3
250	615	320	630	101.2
300	615	320	700	111.2
350	615	320	800	128.2
360	615	320	900	175.2
370	615	320	1050	208.8
500	775	360	750	192.2
740H750	830	450	750	240.5
740H880	835	450	880	298.2
740H950	838	450	950	331.2
740H1280	848	450	1280	475.5
740H1360	850	450	1360	513.2
1800H760	1030	540	760	362.1
1800H815	1035	540	815	417.2
1800H830	1035	540	830	429.8
1800H900	1035	540	900	473.5
1800H1100	1040	540	1100	620.1
1800H1200	1045	540	1200	691.5
1800H1300	1050	540	1300	764.1

Form BU

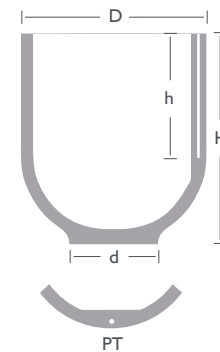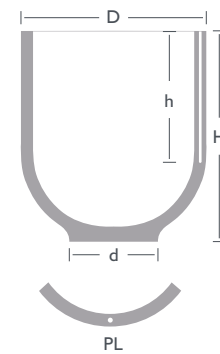

Size BN_ALUS	D (mm)	d (mm)	H (mm)	PT h (mm)	PL h (mm)	Walter brimful capacity (L)
150	525	230	490	290		65.1
175	525	230	550	350		74.2
200	527	230	600	400		82.9
204	527	230	700	500		99.8
210	615	245	500	250		87.1
250	615	245	630	380		118.1
300	615	245	700	450		133.8
350	615	245	800	550		154.1
370	625	245	900			180
400	715	305	600		260	143.5
410	715	305	700		360	176.8
420	715	305	800		460	207.2
510	750	300	910			232.4
500	775	310	750	450		219.3
600	780	310	900	460		280.1
687	830	285	900			318.2
690	830	285	1000			362.2
750	875	350	880			330.1
800	880	350	1000		580	392.1
900	880	350	1100			440.7
1100	880	350	1170			475.2
1200	880	350	1250			514.1
1500	880	350	1500			643.2
1800	1030	350	1600			868.5

PT = Pyrometer-pocket

PL = Pyrometer-hole

Product shape BN are available with or without Pyrometer-pocket/Pyrometer-hole

Standard type pyrometer-pocket or pyrometer-hole opposite of the spout (180°)

Other dimensions on request

Size TBN_ALUS	D (mm)	d (mm)	H (mm)	PT h (mm)	PL h (mm)	Walter brimful capacity (L)
287	525	230	600	400		67.1
387	615	245	630			85.2
412	615	245	800			133.2
412H	615	245	900			149.5
410	715	305	700			145.1
587	780	310	900			229.4
587H	780	310	1000			258.8
687	830	285	900			269.8
690	830	285	1000	590		322.1
750	875	350	880			289.2
800	880	350	1000	580		338.8
900	880	350	1100			397.1
1100	880	350	1170	750		423.3
1200	880	350	1250			471.9


PT = Pyrometer-pocket  
PL = Pyrometer-hole

Product shape TBN are available with or without Pyrometer-pocket/Pyrometer-hole




Standard type pyrometer-pocket or pyrometer-hole opposite of the spout(180°)

Other dimensions on request

**Form TBN**



**Form F**



**BN-shape with spout**

**Form NO**





Size F_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
107	330	215	635	31.6

Size NO_ALUS	D (mm)	d (mm)	H (mm)	PT h (mm)	PL h (mm)	Walter brimful capacity (L)
150	345	270	465			27.6




Size NO_ALUS	D (mm)	d (mm)	H (mm)	PT h (mm)	Walter brimful capacity (L)
30.430	700	305	430		89.1
30.450	700	305	450		93.1
30.525	700	305	525		114.9
30.585	700	305	585		137.6
30.597	700	305	597		142.5
30.630	700	305	630		152.8
30.720	705	305	660		162.1
30.765	705	305	685		170.5
30.810	705	305	735		186.8
30.785	710	305	785		202.8
30.900	710	305	800		208.1
31.000	715	305	875		232.1
31.100	715	305	940		253.4
41.100	865	350	750		262.3
41.200	865	350	815	395	291.8
41.300	875	350	865	445	326.2
41.400	880	350	915	495	351.2
41.500	880	350	965	545	375.2
41.600	880	350	1015	595	399.5
41.700	880	350	1065	645	424.1
41.900	880	350	1165	745	478.2
42.000	880	350	1215	795	496.3

PT = Pyrometer-pocket

Form NO



Form NO



Size NO_ALUS	D (mm)	d (mm)	H (mm)	PL h (mm)	Walter brimful capacity (L)
60.615	1030	540	615		322.1
60.700	1030	540	700		341.5
60.915	1035	540	915		422.1
60.990	1035	540	990	570	532.4
61.320	1050	540	1320		779.2

PL = Pyrometer-hole

Size B_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
850H1170	850	350	1170	440.5
850H1430	850	350	1430	546.2

Size P_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
15	540	330	970	127.5
15H900	540	330	900	115.8
830	540	330	1190	158.5

Also available with cut-out for spout  
Other dimensions on request

**Form P**





**Form R**



Size R_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
500H700	470	340	700	68.1
500H715	475	340	715	69.8
500H775	480	340	775	76.8
500	480	340	840	85.6
600	480	340	940	96.1

Size TP_ALUS	D (mm)	d (mm)	H (mm)	T (mm)	Walter brimful capacity (L)
89	540	300	740		89.7
125	520	305	450		35.4
287	527	305	600		56.5
387	615	320	630		79.2
412	615	320	800		115.5
412H1050	615	320	1050		174.2
587	780	350	900		196.2
1800H1250	1045	540	1250		658.1
1800H1300	1050	540	1300		693.1
1800H1320	1050	540	1320		708.1

**Form TP**



**Cylindrical crucibles**



Size ZYL_ALUS	D (mm)	d (mm)	H (mm)	Walter brimful capacity (L)
700×330	330	328	700	38
700×345	345	345	700	40.3
800×390	390	380	800	53.6
1050×430	430	415	1050	84.5
760×465	465	460	760	83.5
1000×465	465	460	1000	112.3
1000×480	480	470	1000	112.3
815×510	510	510	815	107.5
1220×650	650	630	1220	280.7
1505×660	660	630	1505	349.3
750×810	810	800	750	263.5
1140×820	820	800	1140	424.5
1560×830	830	800	1560	592.8
1030×910	910	740	1030	497.1
1200×920	920	740	1200	551.2
1500×935	935	740	1500	750.5
1650×935	935	740	1650	791.5
1850×940	940	740	1850	891.7
2025×950	950	740	2025	1009.5
880×970	970	735	880	469.2
1475×980	980	735	1473	820.1
1560×980	980	735	1560	816.5
1850×985	985	735	1850	1052.1
2025×988	988	735	2025	1060.2
2200×990	990	735	2200	1280.1

Other dimensions on request